

IKOfix COLD ROOF FASTENER


PRODUCT INFORMATION

Used for securing membranes in conjunction with IKOfix pressure plates into timber, plywood or OSB substrates.
Can also be used without pressure plates for securing other ancillary items such as peelstop bars, toothed flatbars or sections of membrane coated metal.
Made of high quality hardened carbon steel that helps to maintain proper static and dynamic characteristics and pass the European standard 15 cycle Kesternich test

Description	Fixing for Timber Substrates
Material	Carbon Steel
Length	45mm – 120mm
Fixing Dia.	5.0mm/5.8mm
Head Type	PH2/TORX 25 Drive
Product Number	37853xxx

FEATURES & BENEFITS

- Cold Application
- Excellent mechanical properties
- Quick and easy installation
- Cost effective application

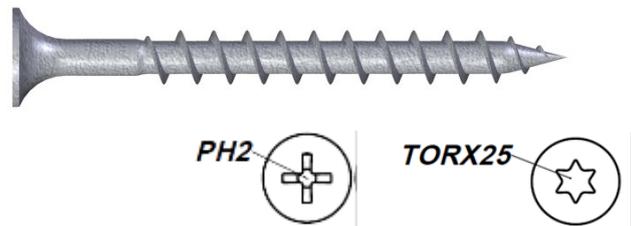

INSTALLATION



1. Position pressure plate and insert Cold Roof fixing.
2. Using a drill fitted with the correct drive bar and stop bit screw the fastener into the substrate until the fixing depth is reached.

TYPICAL PROPERTIES

Screw Length (mm)
45
55
75
120

Substrate		Timber Grade C24	Plywood / OSB
Screw diameter	mm	5.0	5.0
Hole diameter in substrate	mm	-	-
Min. hole depth in substrate	mm	-	-
Installation depth	mm	25	18
Min. substrate thickness	mm	25	18

STORAGE

IKOfix Fasteners should be kept dry. They should be stored in their original cartons raised off the surface of the roof and covered with a suitable waterproof layer.

FURTHER PRODUCT INFORMATION

Full product literature, health & safety and technical sheets are available as downloads from our website www.ikopolymeric.com or on request by email polymeric.marketing@iko.com.