

IKO Hyload Trade DPC

Technical Data Sheet – Section 1.10

PRODUCT INFORMATION

A flexible polymeric sheet material, used within solid/ cavity walls to prevent passage of moisture from the ground and at all levels when formed into a cavity tray profile to prevent the downward movement of water.



Roll Width	Product Code
100mm - 1m	316*****

USE

IKO Hyload Trade DPC is used as a horizontal, vertical or stepped damp proof coursing system and is also suitable for the on-site creation of cavity trays within cavity wall construction.

FEATURES & BENEFITS

Developed Components - As part of the IKO Hyload system, the product has a full range of components.

Compressive Load - The system does not extrude under load, under normal working conditions.

Robust resistance to impact damage, under normal working conditions.

COMPOSITION

Material:	Polymeric
Form:	Roll
Colour:	Black
Thickness:	0.9mm
Weight:	1.26kg/m ²
Roll Length:	20m
Roll Width:	100mm – 1000mm
Surface Finishes:	(upper) Grained (lower) Grained
Selvage:	None

INSTALLATION

Membrane Bond:	Loose Laid
Lap Bond:	Taped

For further information please refer the 'IKO Hyload DPC System Guidance Document'

DURABILITY

When properly specified and installed, the system in normal circumstances, will remain effective for the lifetime of the building.

PRODUCT ACCREDITATIONS



The product carries a BBA Agrément Certificate 95/3133, a Declaration of Performance Certificate (DoP) and is UK Conformity Assessed.

OTHER RELEVANT DOCUMENTATION

Where applicable, Material Safety Data Sheets (MSDS), Declaration of Performances (DoPs), and Third-Party Accreditations are available to view and download from the IKO website Resource Centre:

<https://ikogroup.co.uk/resource-centre/>

PRODUCT SUPPORT


Should you have any queries in relation to this product please contact one of the relevant teams below:

Technical	technical.ab@iko.com - For Reinforced Bitumen Membranes, IKOpro and Flexia Liquid Applied Waterproofing, Pitched Roofing, IKO Hyload Structural Waterproofing technical.ma@iko.com - For Mastic Asphalt technical.cc@iko.com - For Single Ply and Permatec Hot Melt
Sales	sales.uk@iko.com
Marketing	getintouch.uk@iko.com

COMPANY ACCREDITATIONS

IKO PLC, a roofing, waterproofing, and insulation company, holds various accreditations that demonstrate its commitment to quality, safety, and environmental responsibility. These include ISO certifications for quality management and occupational health and safety, British Board of Agrément (BBA) accreditations for specific products and systems, and Factory Mutual (FM) approval for certain roofing systems.

All our manufacturing plants have BS EN ISO 9001, BS EN ISO 14001, BS EN ISO 45001, and BES 6001 accreditation, meaning we match the quality and sustainability requirements and use responsibly sourced raw materials in our production. We also re-use by-products from manufacture, wrap products in minimal packaging, and we employ a streamlined transportation network.

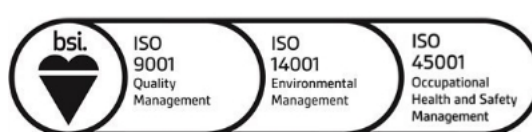

IKO is also a leading member of all relevant trade associations such as NFRC, BFRA, SPRA, LRWA, MAC, RSTA, BJA and LCRIG having technical experts within the technical and standards committees to help us get informed first-hand about recent updates on technical requirements for the design and installation of roofing, waterproofing, road and bridge maintenance industry products.



DISCLAIMER

Whilst every precaution is taken to ensure that the information given in this literature is correct and up-to-date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded.

IKO reserves the right to amend and/or withdraw this document without notice.

Intending purchasers of our materials should therefore verify with the company whether any changes in our specification, application details, withdrawals or otherwise have taken place since this literature was published.