

IKO ARMOURPLAN PSG PVC MEMBRANE

Technical Data Sheet – Section 14.00

PRODUCT INFORMATION

IKO Armourplan PSG is a glass tissue, reinforced, fleece-backed PVC membrane suitable for use in a wide range of single-ply roofing applications. This includes both flat and sloping roofs. IKO Armourplan PSG offers enhanced mechanical properties over standard PVC membranes and is completely UV stable throughout.

USE

IKO Armourplan PSG is a waterproofing membrane suitable for a variety of roofing applications on flat and sloping roofs. The Armourplan PSG system is applied using bonding adhesives such as IKO's Spectrabond Low Foaming PU adhesive or IKOpro Sprayfast FMA adhesive to a structural substrate in both warm and uninsulated roof build ups. This fleece-backed PVC membrane forms a sleek skin on many types of roof application. It can be adhered onto most common substrates and is suitable for both new build and refurbishment installations, as well as specialist applications like simulated metal roofs.

The product must be applied by an IKO Approved Installer. All work must be undertaken in accordance with the requirements of the specific information provided with the issued IKO Specification document, or guidance documents where applicable.

As this product is utilised within an Approved Contractor network and guided by an IKO Specification document, where omission or differing information exists the IKO Specification document will take precedence.


OPTIONS

System	Roll Size	Product Code	Colour
IKO Armourplan PSG	20m x 2.12m x 1.2mm*	71021212	Mid Grey
IKO Armourplan PSG	20m x 2.12m x 1.2mm*	68021212	Slate Grey

*Excluding fleece backing

COMPOSITION

Material:	PVC-P
Carrier:	Glass
Form:	Roll
Weight (2120mm roll):	77.5kg
Colour:	Mid Grey (nearest RAL 7046)/Slate Grey (nearest RAL7015)
Thickness:	1.2mm

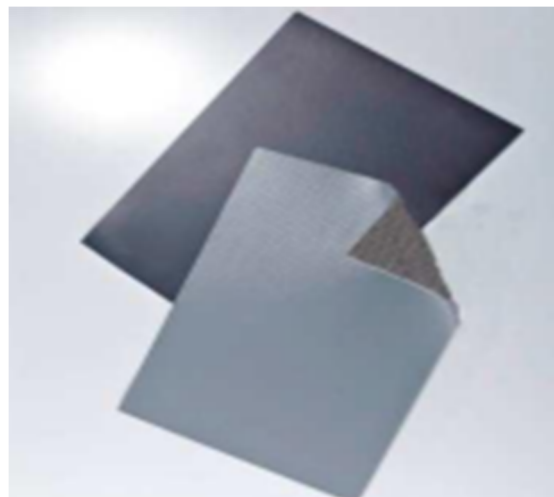

FEATURES & BENEFITS

- Lightweight and flexible
- Strong, long lasting welded seams
- UV resistant
- BBA certified

INSTALLATION

As a first step, agitate/shake the IKO Low Foaming PU adhesive drum. Replace the container lid when work is interrupted or completed. Ensure material is stored in temperatures of 5 degrees or above.

Unroll the IKO Armourplan PSG over the prepared substrate and fold back approximately half its length.

Using a sheepskin or similar roller apply a coat of IKO Low Foaming PU to the substrate surface, or apply IKOpro Sprayfast FMA adhesive, applying only the area of roof where the membrane will be laid. The adhesive must be given time to activate prior to applying the membrane. On activation i.e. the point at which the adhesive will afford the highest bond strength, the surface of the adhesive starts to change from pink to opaque.

Carefully unravel the IKO Armourplan PSG onto the primed surface and roll with water filled roller or soft bristled broom. Fold back the other half of the roll of IKO Armourplan PSG and repeat the process.

Unroll the next roll of IKO Armourplan PSG, ensuring that the roll ends are butt jointed and that the side overlaps the previously installed sheet by 120mm. Fully hot air weld the side lap and allow to cool completely.

Install a 200mm wide cover strip of IKO Armourplan SM/P over the butt jointed end laps and hot air weld and allow to cool completely. Check the integrity of the cooled weld by running a seam probe tool along the seam, applying pressure into the seam.

At upstands and at all roof penetrations, secure the IKO Armourplan PSG membrane with an IKOfix Peelstop bar. Cover 10mm gap in the IKOfix Peelstop bar with a 50mm x 50mm piece of IKO Armourplan SM and weld to the roof sheet. Apply waterproofing to the IKOfix Peelstop bar with the upstand flashing hot air welded to the roof sheet.

To complete the installation of IKO Armourplan PSG, the system includes a wide range of accessories, including detailing and walkway membrane cover strips, preformed corners and outlets, standing seam profile pre-coated metal sheet for forming edge details, IKOfix fastening systems and termination bars, insulation and vapour control layers, adhesives, cleaners, sealants and roof lights

NB: This is a guide only – please refer to IKO Armourplan Installation Guide for Contractor notes.

MAINTENANCE & REPAIR

Maintenance must be undertaken in accordance with the terms of the guarantee. The waterproofing must be protected from any follow-on trades or other works that may affect the waterproofing. Once completed, access will be required for future inspections and maintenance. Maintenance of drainage outlets, plant items and services etc. will be required to ensure the long-term performance of the waterproofing system.

The client is to ensure safe access is provided to allow maintenance. Unauthorised access should be prevented from all parties not associated with the installation of the waterproofing, inspection or maintenance. Designated walkways should be provided for maintenance and means of escape.

PRODUCT ACCREDITATIONS



This product carries a Declaration of Performance Certificate, Agreement Certificate 05/4287, and is UK conformity Assessed.

Copies of the relevant certification may be downloaded from the IKO website <https://ikogroup.co.uk/resource-centre/>

OTHER RELEVANT DOCUMENTATION

Where applicable, Material Safety Data Sheets (MSDS), Declaration of Performances (DoPs), and Third-Party Accreditations are available to view and download from the IKO website Resource Centre:

<https://ikogroup.co.uk/resource-centre/>

PRODUCT SUPPORT

Should you have any queries in relation to this product please contact one of the relevant teams below:

Technical	technical.ab@iko.com - For Reinforced Bitumen Membranes, IKOpro and Flexia Liquid Applied Waterproofing, Pitched Roofing, IKO Hyload Structural Waterproofing technical.ma@iko.com - For Mastic Asphalt technical.cc@iko.com - For Single Ply and Permatec Hot Melt
Sales	sales.uk@iko.com
Marketing	getintouch.uk@iko.com

COMPANY ACCREDITATIONS

IKO PLC, a roofing, waterproofing, and insulation company, holds various accreditations that demonstrate its commitment to quality, safety, and environmental responsibility. These include ISO certifications for quality management and occupational health and safety, British Board of Agrément (BBA) accreditations for specific products and systems, and Factory Mutual (FM) approval for certain roofing systems.

All our manufacturing plants have BS EN ISO 9001, BS EN ISO 14001, BS EN ISO 45001, and BES 6001 accreditation, meaning we match the quality and sustainability requirements and use responsibly sourced raw materials in our production. We also re-use by-products from manufacture, wrap products in minimal packaging, and we employ a streamlined transportation network.



IKO is also a leading member of all relevant trade associations such as NFRC, BFRA, SPRA, LRWA, MAC, RSTA, BJA and LCRIG having technical experts within the technical and standards committees to help us get informed first-

hand about recent updates on technical requirements for the design and installation of roofing, waterproofing, road and bridge maintenance industry products.



the Bitumen
Flat Roofing
Association



DISCLAIMER

Whilst every precaution is taken to ensure that the information given in this literature is correct and up-to-date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded.

IKO reserves the right to amend and/or withdraw this document without notice.

Intending purchasers of our materials should therefore verify with the company whether any changes in our specification, application details, withdrawals or otherwise have taken place since this literature was published.