
# IKO Preformed Drip

**Technical Data Sheet – Section 11.00**

## PRODUCT INFORMATION

IKO Preformed Drips comprise of a 0.8mm galvanised steel backing to which is factory laminated with a SBS modified bituminous membrane with a mineral finish. The bituminous membrane extends beyond the steel base to allow a lap joint with the main waterproofing membrane to be created.

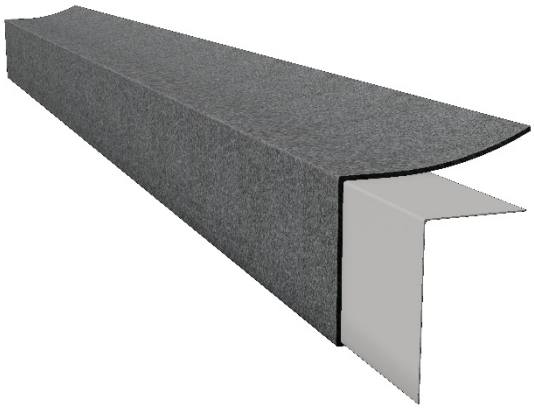

| Identifier | Product Code |
|---|---|
| IKO Preformed Drip | 59200015 |

## USE

The IKO Preformed Drips are designed to be rapidly and securely finish the perimeter detailing of bituminous membrane flat roofing systems. The standard units are designed to fit most open perimeter details and are fully compatible with most IKO specified roofing systems.

This product must be installed by an IKO Approved or Registered Installer. All work must be undertaken in accordance with the requirements of the specific information provided with the issued IKO Specification document, or guidance documents where applicable.

## FEATURES & BENEFITS


Uniform Size - Standard units available from stock.
Quick Simple Installation - Quick, standard detail reducing installation time and creates a robust uniformed detail.
Reduced Felt Wastage - Eliminates the need to trim felt rolls to create drip details.

## COMPOSITION

| | |
|---|---|
| Material Type: | Galvanised Steel & Bitumen |
| Form: | L Sections |
| Colours: | Black |
| Overall Length: | 1.6m |
| Drip Down Stand: | 100mm |
| **Fixing Flange** | |
| Length: | 1.5m |
| Thickness: | 0.8mm |
| Drip: | 100mm |
| Arm: | 60mm |
| **Bitumen Flange** | |
| Overall Width: | 160mm |
| Unbonded Section: | 30mm |
| Overlap Flange: | 100mm |
| Side Lap Flange: | 100mm |



IKO PLC is a company registered in England with company no. 2678296

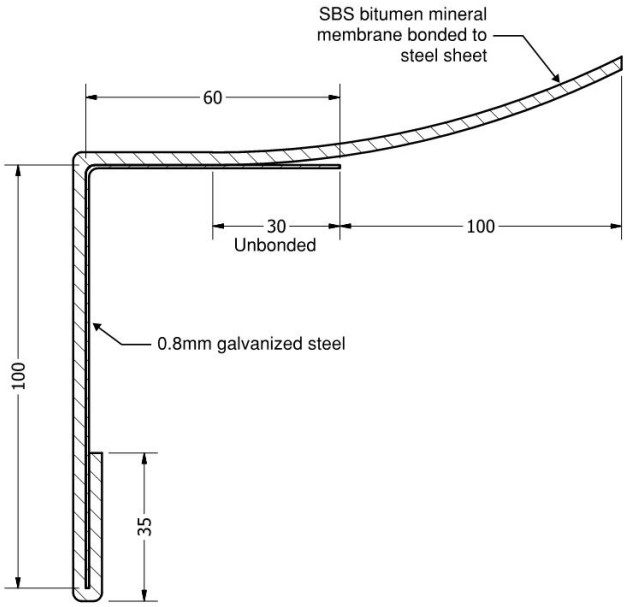


# INSTALLATION


## Installed as Drip Edge

Suitable timber hard edge to be installed, this should be 10mm shorter than any proposed insulation to prevent lap build up.

Secure IKO preformed drip, in between the waterproofing underlay and cap sheet, mechanically fastened 30mm (max) from the ends at 300mm centres maximum (150mm centres for areas of high wind uplift). Using countersunk screws or suitable fixings (minimum 20mm long) into the sound substrate.

When fixed the drip should have a 3mm clear gap from wall or fascia.

The integrated felt flange should be suitably welded (using an appropriate method for the specified waterproofing system) to the specified underlay. Then the cap sheet installed over the top terminating the cap sheet 25mm back from the perimeter edge.

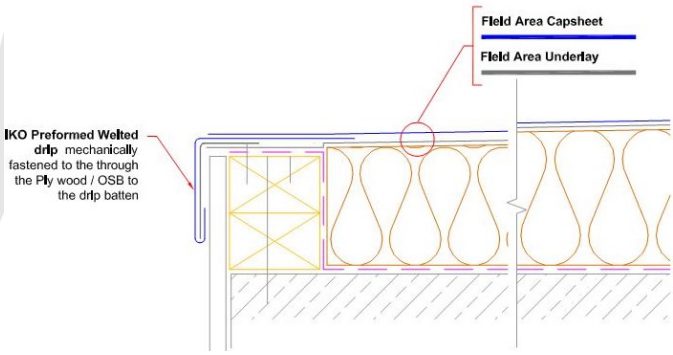


## Installed as Drip to Gutter


Suitable timber hardedge should be installed, this should be 20mm shorter than any proposed insulation to prevent lap build up with a 50mm x 50mm timber batten face fixed to the timber hardedge with suitable fixings, over this minimum 18mm OSB /Plywood should be mechanically fixed to both the timber hardedge & fixing batten, to give a suitable substrate for the Preformed Drip to be installed.


IKO PLC is a company registered in England with company no. 2678296

Secure IKO preformed drip, in between the waterproofing underlay and cap sheet, mechanically fastened 30mm (max) from the ends at 300mm centres maximum (150mm centres for areas of high wind uplift). Using countersunk screws or suitable fixings (minimum 20mm long) into the sound substrate.

The drip should sit a minimum 20mm into the gutter but must not touch the gutter base and should over sail the back of the gutter trough by a minimum 20mm, so that any water is discharged into the gutter freely.

The integrated felt flange should be suitably welded (using an appropriate method for the specified waterproofing system.) to the specified underlay. Then the cap sheet installed over the top terminating the cap sheet 25mm back from the perimeter edge.

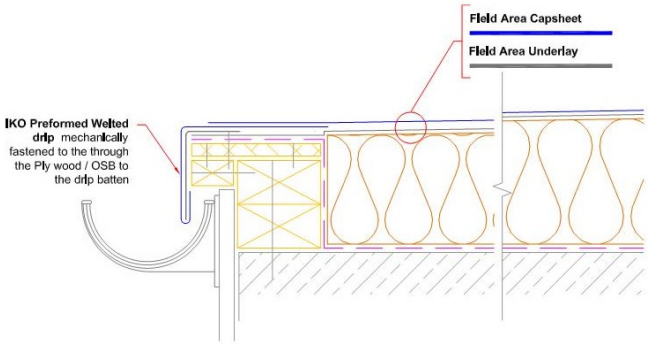


For further information please refer the IKO Specification Document.

## DURABILITY

When installed as part of a IKO specified built-up roof system and conditions are maintained as per IKO literature, relevant Codes of Practice and UK Building Regulations, the product will last the period of the IKO specified system guarantee.

## OTHER RELEVENT DOCUMENTATION

Where applicable, Material Safety Data Sheets (MSDS), Declaration of Performances (DoPs), and Third-Party Accreditations are available to view and download from the IKO website Resource Centre:
https://ikogroup.co.uk/resource-centre/

## PRODUCT SUPPORT

Should you have any queries in relation to this product please contact one of the relevant teams below:

**Technical** technical.ab@iko.com
- For Reinforced Bitumen Membranes, IKOpro and Flexia Liquid Applied Waterproofing, Pitched Roofing, IKO Hyload Structural Waterproofing

technical.ma@iko.com
- For Mastic Asphalt

technical.cc@iko.com
- For Single Ply and Permatec Hot Melt

**Sales** sales.uk@iko.com

**Marketing** getintouch.uk@iko.com


IKO PLC is a company registered in England with company no. 2678296

## COMPANY ACCREDITATIONS

IKO PLC, a roofing, waterproofing, and insulation company, holds various accreditations that demonstrate its commitment to quality, safety, and environmental responsibility. These include ISO certifications for quality management and occupational health and safety, British Board of Agrément (BBA) accreditations for specific products and systems, and Factory Mutual (FM) approval for certain roofing systems.

All our manufacturing plants have BS EN ISO 9001, BS EN ISO 14001, BS EN ISO 45001, and BES 6001 accreditation, meaning we match the quality and sustainability requirements and use responsibly sourced raw materials in our production. We also re-use by-products from manufacture, wrap products in minimal packaging, and we employ a streamlined transportation network.

IKO is also a leading member of all relevant trade associations such as NFRC, BFRA, SPRA, LRWA, MAC, RSTA, BJA and LCRIG having technical experts within the technical and standards committees to help us get informed first-hand about recent updates on technical requirements for the design and installation of roofing, waterproofing, road and bridge maintenance industry products.

## DISCLAIMER

Whilst every precaution is taken to ensure that the information given in this literature is correct and up-to-date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded.

IKO reserves the right to amend and/or withdraw this document without notice.

Intending purchasers of our materials should therefore verify with the company whether any changes in our specification, application details, withdrawals or otherwise have taken place since this literature was published.



IKO PLC is a company registered in England with company no. 2678296