




REF: BT003

IKO BRITORCH SBS UNINSULATED – HYBRID SYSTEM

SYSTEM INFORMATION

The IKO Britorch SBS Uninsulated – Hybrid System is a built-up flat roof solution offering the specifier and client a premium flat roofing solution for new build and refurbishment projects.

This configuration is specific to an uninsulated or cold flat roof solution.

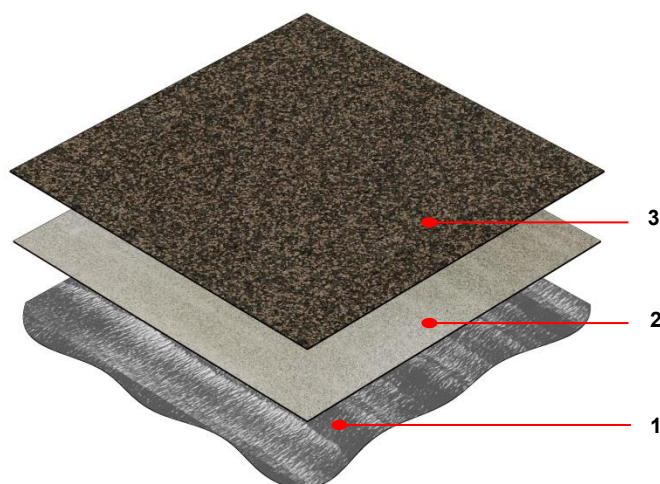

USE

As a cold flat roof solution, this system has been developed with the roofing professional in mind, incorporating a range of high performance SBS modified waterproofing membranes to provide a robust built-up roofing system capable of withstanding maintenance foot traffic.

SUMMARY OF SYSTEM COMPONENTS

1. IKOpro Easyseal Bonding Agent

Fast-drying rubber modified bituminous priming solution designed to prepare substrates for the application of self-adhesive (S-A) bitumen waterproofing membranes.

Pack size: 5L

Typical Coverage: 3-5 m²/litre*

Product Code: 2350005

**Dependent on substrate and porosity.*

2. IKO Easyseal Heat-Activated Partially Bonded Underlay

High performance, self-adhesive SBS modified polyester reinforced bitumen membrane. The underside has a self-adhesive bitumen coating that provides a 40% partial bond allowing vapour dispersion between the membrane and substrate. The underside has a 75mm selvedge that facilitates a rapid installation of the lap joints.

Roll size: 16m x 1m

Roll weight: 36 kg

Surfacing: Fine mineral

Product Code: 74170016

2a. IKO Easyseal Heat-Activated Fully Bonded Underlay

High performance, self-adhesive SBS modified polyester reinforced bitumen membrane. The underside has a self-adhesive bitumen coating for fully bonded and all waterproofing detailing applications.

Roll size: 16m x 1m

Roll weight: 36 kg

Surfacing: Fine mineral

Product Code: 74070016

3. IKO Britorch SBS Cap Sheet

High performance polyester based SBS modified bitumen torch-on cap sheet.

Roll size: 8m x 1m

Roll weight: 40 kg

Product Codes: Green – 73017000; Black - 73016000;